

AQUAPHONICS AQ10 + AQ11

User Guide

SECTION 1

SPEAKER ANATOMY

AQ10 + AQ11 ANATOMY



Power Button

Long press to turn on and off
Short press to check battery level

Lock Switch

Flip to lock and unlock all buttons

AQ10 + AQ11 ANATOMY



3.5 mm Auxiliary Audio Jack

Stream by wire


Power In

Recharge your speaker

USB Charge Out

Plug in and charge up your device

AQ10 + AQ11 ANATOMY

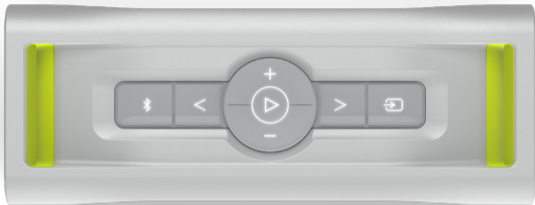

Pair

Connect to Bluetooth devices

Back

Return to the previous track

Play

Press to get the party started

Forward

Advance to the next track

Source

Switch between audio sources

Volume Down

Hush your music

Volume Up

Amplify your music

AQ10 + AQ11 ANATOMY



Drybox

Watertight space to stash your stuff

3.5 mm Auxiliary Audio Jack

Stream by wire

USB Charge Out

Press to get the party started

SECTION 2

GETTING STARTED

AQ10 + AQ11 QUICK START

Make sure the Lock Switch is flipped to unlocked

Press the Power button until you hear chimes

AQ10 + AQ11 automatically go into pairing mode, and the Pair LED blinks

Go to your device's Bluetooth settings, pick LIFEPROOF AQ10 or LIFEPROOF AQ11 and follow the manufacturer's pairing instructions

When you connect, the speaker chimes and the Pair LED slowly pulses

To connect a different device, press the Pair button until it blinks and chimes, and follow the same steps

Pick a track and hit Play

Use the Volume Up, Volume Down, Back and Forward buttons to control the music

Press Play to pause the music — press it again to resume

Press and hold the Power button until you hear a chime to turn AQ10 + AQ11 off

SECTION 3

DRYBOX

AQ10 + AQ11 DRYBOX

To open the Drybox, slide the latch and pull up on the lid

Stash your stuff in the compartment — it's watertight when fully closed

Use the 3.5 mm Auxiliary Audio Jack and USB ports to connect small, Wi-Fi devices and other audio sources

To close, slide the latch, push down on the lid until seated and release the latch

SECTION 4

EXTERNAL AUDIO SOURCES

AQ10 + AQ11 AUDIO SOURCES

AQ10 + AQ11 have two 3.5 mm Auxiliary Audio Jacks to stream by wire — one on the right side and one in the Drybox

To use, connect a compatible cable from the audio source to the speaker

Press the Source button to switch between audio sources

Press the Source button again to return to your Bluetooth source

SECTION 5

LOCK SWITCH

LOCKING AQ10 + AQ11

Once you have your settings dialed in, you can lock them down with the Lock Switch

Flip the Lock Switch to the Locked icon to shut down button functions

Flip it to the Unlocked icon to bring function back

If a call comes through while Locked, flip to Unlocked to answer

SECTION 6

CHARGING SPEAKER

CHARGING AQ10 + AQ11

Use the included 12V, 2A power adaptor to charge AQ10 + AQ11 (indoors only)

The Power Level LEDs light up to show the charging progress — each illuminated LED represents approximately 25% of capacity

Disconnect the power adaptor when AQ10 + AQ11 reaches 100% charge

To check the power level, press the Power button and count the illuminated LEDs

SECTION 7

CHARGING DEVICES

CHARGING DEVICES

AQ10 + AQ11 let you charge out to mobile devices

Connect the charge cable from the device to the USB port on the side of your speaker or in the Drybox

Note: when the Drybox is open, AQ10 + AQ11 are not WaterProof

Tap the Power button to start charging out — the charge icon appears on your device

When the device hits 100%, charging stops automatically

For AQ10 only, volume is limited while charging out to extend playtime — if the charging stops because the volume's too high, lower the volume and press power to start charging again

Note: The speakers do not support charge out from both ports simultaneously

SECTION 8

HANDS-FREE CALLING

HANDS-FREE CALLS

When you're connected to AQ10 + AQ11, you can take calls through the speaker

As the call comes in, the music stops and AQ10 + AQ11 turn into speakerphones

Press Play to answer

When the call ends, press Play to hang up — the music picks back up

Note: mic is located under the front metal grille

SECTION 9

CARE

CARING FOR YOUR AQ10 + AQ11

Wipe with a dry cloth if it gets dirty

Rinse with fresh water after exposure to soap, chlorine or seawater

Do not use solvents, chemicals, cleaning solutions, alcohol, ammonia or abrasives

SECTION 10

WARNING

SAFETY INSTRUCTIONS

Read, heed and refer back to these instructions and warnings

Use in accordance with LifeProof instructions

Do not store your speaker in extremely cold or hot places

Only use attachments/accessories specified by LifeProof

Unplug your speaker during lightning storms or when unused for long periods of time

Information such as model number, electrical rating and other classifications is located on the back of your speaker

Do not expose this device to excessive heat or place in a fire

Device contains no user serviceable parts — do not attempt to disassemble, modify or repair this device

Dispose of this product properly and in accordance to local disposal requirements — do not dispose in trash or fire

Failure to follow the above warnings may result in damage to persons or property, so please follow all warnings!

Water: Your speaker is waterproof to 1 meter for 30 minutes. Prolonged exposure is not recommended.

Drop: Your speaker is drop proof to 1.2 meters. After major impacts, inspect for damage, including port cover seals.

Heat: Never expose your speaker to fire, flame or lighted candles. Do not install near heat sources like radiators, heat registers, stoves, amplifiers or other apparatus that produce heat.

Battery: Do not leave a battery on prolonged charge when not in use. The battery provided with your speaker is not user serviceable. Contact LifeProof Customer Service for all battery related issues.

Charging: The charger provided is designed for indoor use only. Charge your speaker with the provided adapter.

Repair: Never dismantle your speaker. Refer all servicing to qualified service personnel. Servicing is required when your speaker has been damaged in any way. Contact LifeProof Customer Service.

SECTION 11

SUPPORT

AQ10 + AQ11 SUPPORT

Visit **www.lifeproof.com/speakers** for support

Life Support: If the LifeProof product was purchased from a retailer or other reseller of LifeProof product, you should first contact that retailer/reseller to ask about their return policy.

If you are within the return policy of your retailer/reseller, you should return your LifeProof product to them.

If you are no longer covered by the return/refund policy of that retailer/reseller, please contact LifeProof support.

Customer Service: USA + Canada 1.888.533.0735 Toll Free

www.lifeproof.com/support

SECTION 12

WARRANTY

AQ10 + AQ11 LIMITED WARRANTY

All LifeProof products are backed by a limited warranty. Product warranty only covers the LifeProof product – it does not cover any non-LifeProof product or device. Otter Products, LLC together with its affiliated entities worldwide is the company responsible for providing this warranty coverage. Visit www.lifeproof.com/policies-and-warranties for more information.

SECTION 13

REGULATIONS

REGULATIONS

FCC Statement: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. FCC radiation exposure statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

IC Statement: This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

IC Radiation Exposure Statement: This equipment complies with Canada radiation exposure limits

set forth for uncontrolled environments. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

European RED statement:

Hereby, Otter Products, LLC. declares that the radio equipment type LPSAN-005-A, LPSAN-0006-A, and LPSAN-0007A are in compliance with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available for each model at www.lifeproof.com/speakers

Bluetooth Specification:

Bluetooth Version: 4.2 (All Models)


Frequency band: 2.4GHz band (All Models)

Maximum output power LPSAN-0006-A AQ10: 0.83 mW

Maximum output power LPSAN-0007-A AQ11: 0.96 mW

CE Mark: Please refer to www.lifeproof.com/speakers for a European Declaration of Conformity showing the product standards that this product is in compliance with and why Otter Products, LLC is able to place the CE mark on this product.

RoHS Compliance: Please refer to www.lifeproof.com/speakers for additional RoHS compliance information for this product.

WEEE:  This symbol on the product and/or accompanying documents means that used electrical and electronic products should not be mixed with general household waste. For proper treatment, recovery and recycling, please take this product to a designated collection point where it will be accepted free of charge. Alternatively, in some countries you may be able to return your product to your local retailer upon purchase of an equivalent new product. Disposing of this product correctly will help save valuable resources and prevent any potential negative effects on human health and the environment, which could otherwise arise from inappropriate waste handling. Please contact your local authority for further details of your nearest designated collection point.

 California Energy Commission compliant.

Please refer to www.lifeproof.com/speakers for additional regulatory information.

Regulatory Model Number (RMN): LPSAN-0005-A.

SECTION 14

LEGAL

LEGAL NOTICES

Though all LifeProof products are tested to meet stated claims, your device can still be damaged. It is your responsibility to take reasonable precautions regarding how you use your device. Expose your device to hazards at your own risk. The LifeProof product warranty only covers the LifeProof product — it does not cover any non-LifeProof product or device, and does not provide warranty protection in all circumstances. Consult the LifeProof product warranty for full details.

For maximum protection, follow all instructions regarding your LifeProof product, and never substitute or otherwise rely on a LifeProof product instead of regular backups or device insurance.

Do not use a damaged LifeProof product for protection!

#LIVELIFEPROOF

